



Plan and Reenactment of Fluffy Rationale Framework for Control of Pneumatic Valve for Bottle Washer within the Refreshment Industry

Abu Feyo Bantu^{1*}

¹ Faculty of Electrical and Computer Engineering, Jimma Institute of Technology, Jimma University, Ethiopia
E-mail: abu.feyo@ju.edu.et

Abstract - The objective of this paper presents the numerical demonstration of the pneumatic valve unit with the Model reference versatile regulator in drink fabricating organizations for the container washing process. Earlier to utilizing the holders after it is gotten back from the clients' side, it ought to be cleaned within the container washer sometime recently they can be reused. The release of clean jugs constrained by the pneumatic valve of the container clothes washer once in a while sticks or bombs which brings about huge loss of creation in the plant, since the wide range of various cycles which follow rely upon the jug clothes washer. The primary target of this examination is to decide the fundamental driver of the staying and coming up short of the pneumatic valve clothes washer and to give reasonable versatile control arrangements that abatement smashing circuits. Featherly Rationale Controller has way better clamor expulsion and is heartier to the changing plant boundaries when differentiated with PID controllers and no complex numerical show is required for the system controller setup differentiated with the standard control procedure. Nonetheless, the Fuzzy Logic Controller can't adjust to the changing nature and working conditions, so it is important to utilize some type of transformation to accomplish the ideal prerequisites of the framework to changing ecological and working conditions. In this review, MRAC will be adjusted to give the transformation needed to accomplish the wanted framework execution. Thus, this paper will introduce a relative investigation of MRAFC and F-PID regulator setup for the pneumatic valve of jug washers in the Beverage Company. At last, the created framework will be tried for a long time runs utilizing MATLAB/Simulink tool compartment and the viability and legitimacy of the proposed control approach will be checked by reenactment result dependent on different control framework boundaries, for example, rise time, settling time, and pinnacle overshoot.

Keywords - Model Reference Adaptive Control (MRAC), Proportional Integral Derivative (PID), Model Reference Adaptive Fuzzy Control (MRAFC), Fuzzy Logic Control (FLC), Pneumatic Valve.

Submission: April 6, 2022

Correction: June 13, 2022

Accepted: June 13, 2022

Doi: <http://dx.doi.org/10.14710/ijee.4.1.49-58>

[How to cite this article: Bantu, A. F. (2022). Plan and Reenactment of Fluffy Rationale Framework for Control of Pneumatic Valve for Bottle Washer within the Refreshment Industry. *International Journal of Engineering Education*, 4(1), 49-58. doi: <http://dx.doi.org/10.14710/ijee.4.1.49-58>]

1. Introduction

Refreshment organizations give consistent food creation by utilizing profoundly computerized frameworks to fabricate their items within a brief period. The items fabricated incorporate organic product juices, filtered water, carbonated and non-carbonated refreshments, and so forth [1-3]. Alcoholic items, for example, Lion Lager, Golden Pilsner, Black Label, various sorts of Beer are produced in refreshment organizations. In drink associations possibly, the most dealt with is bottle washing. Glass bottles returned from the clients are reused thusly, and truly cleaning of these holders is required [4]. The packaged got are, regardless, passed on into the holder dress washer. A compartment washer might be a machine that uses water and unforgiving fragile beverage answer for

forgoing distant substances inside the holders. The holders are, regardless pre-cleaned to discard various pieces and granular tainting. The holder washer uses a pneumatic valve which uses pneumatics to control the entering and release of the cleaned bottles.

This valve includes sensors and robots to control the turns of events. Before the holders are delivered, the pneumatic valve ought to distinguish it are unblemished to accept the containers. The untidy containers are then excused by the Full Bottle Inspector (FBI) hereafter, this extends costs as a piece of the containers are broken [4]. The failure of pneumatic valves achieves the appearance of chaotic holders occasionally prompting extended costs, deferments, and quality control issues. Robots are dominantly used in reward- creating adventures [5, 6].

Robots are multifunctional, re-programmable regulators which are planned to manage parts and move materials and gadgets [7]. The use of robots grows the handiness, quality, prosperity, adequacy, and consistency of things while the usage of AI in robots enables the change to the changing structure components [8]. Cushy Logic (FL) uses mathematical theory, probability speculation, and AI to engage the structure to deal with various issues using human philosophy [9].

The Fuzzy Logic Controller (FLC) has better upheaval excusal and is heartier to the changing plant limits when diverged from PID controllers [10]. Stood out from the common control procedure, the chief advantage of the FLC is that no confounded mathematical model is required for the structure controller plan. Regardless, the FLC can't conform to the changing environmental and working circumstances [11] yet are good for changes their direct from the execution of rule to run the show. It is in this manner critical to use a kind of change to achieve the ideal necessities of the system to changing biological and working circumstances [12]. In this assessment, the Model Reference Adaptive Control (MRAC) system is changed in accordance with give the variety expected to achieve the needed structure execution. MRAC can be used to thus and reliably measure the best outcome and the lead of the system to change the limit of the structures in this manner, staying aware of ideal execution. Issues that could incite valve disillusionment would be perceived and changed quickly, before the breakdown of the machine or dissatisfaction of the valve [13]. From now on the execution of this sharp adaptable system will help with diminishing costs, energy, delays, and patch up. Quality control issues are also decreased, and ideal system execution is achieved by taking measures to compensate for structure agitating impacts and assortments.

For the most part, Model reference fluffy versatile control (MRFAC) works much better in an expansion of security and decrease of clamours for frameworks that have obscure plans, than the regular techniques MRAC and Fuzzy Logic [14]. This exploration work has pointed toward accomplishing exact and precise pneumatic valve clothes washer point control by utilizing MRAFC and Fuzzy PID Controller. The object is to give a superior pneumatic valve position or point control technique by the relative investigation of two regulators.

2. Creative Instrument Plan Strategy

This section describes Developing the Dynamic model and Design controllers (Methodology) and Design Simulink model (Materials).

2.1 Fostering the Dynamic model and Design regulators (Methodology)

The numerical condition of the pneumatic valve Based on the Transfer Function of every component will be finished, Plan and reproduction of the coordinated numerical model will be observed by utilizing two-cross

breed kinds of regulators (MRFAC and Fuzzy PID), the different reactions of the pneumatic valve for MRAFC and Fuzzy PID will be examined on MATLAB/Simulink freely, the examination of both of these planned circuits of MRAFC and Fuzzy PID result will be finished, Plain examination of transient reaction determination will be determined from the graphical reaction of MRAFC and Fuzzy PID regulator.

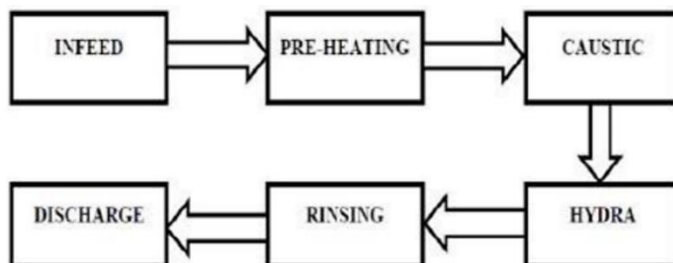


Figure 1. Block Diagram of Bottle cleaning process [15]

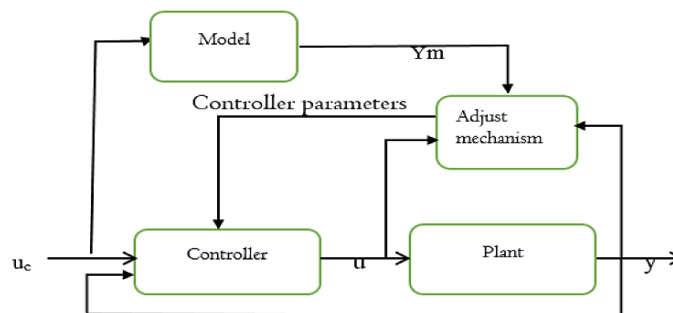


Figure 2. Model Reference Adaptive controller block diagram [16]

2.2 Design Simulink model (Materials)

The designing of the entire models like MRAFC and Fuzzy PID has been carried out using MATLAB 2016a Simulink/Toolbox.

3. Modeling and Control System Design

3.1 Model Reference Adaptive Control

This procedure of versatile control falls under the classification of non-double versatile control. A reference model depicts the framework's exhibition. The versatile regulator is then intended to constrain the framework (or plant) to act as the reference model. The model result is contrasted with the real result, and the thing that matters is utilized to change input regulator boundaries.

MRAC has two circles: an inward circle (or controller circle) that is a conventional control circle comprising of the plant and the controller, and an external (or transformation) circle that changes the boundaries of the controller to drive the blunder between the model result and plant result to nothing, as displayed in Figure 2.

3.2 Components of Model Reference Adaptive Controller

Reference Model

It is utilized to determine the best reaction of the versatile control framework to outside order. It ought to mirror the presentation details in charge of errands. The

ideal conduct determined by the reference model ought to be reachable for the versatile control framework. In this exploration, the overdamped second-request framework is taken as the reference model.

Controller

It is generally defined by a few customizable boundaries. In this examination, two boundaries θ_1 and θ_2 are utilized to characterize the regulator law. The control law is direct as far as the flexible boundaries (straight definition). Versatile regulator configuration ordinarily requires direct definition to acquire a variation component with ensured security and following combination. The upsides of these control boundaries are chiefly reliant upon variation gain which thusly changes the control calculation of the transformation component.

Adaptation Mechanism

It is utilized to change the boundaries in the control law. Variation law looks for the boundaries with the end goal that the reaction of the plant ought to be equivalent to the reference model. It is intended to ensure the dependability of the control framework just as the combination of the following blunder to nothing. Numerical methods like the MIT rule, Lyapunov hypothesis, and expanded blunder hypothesis can be utilized to foster the variation system. In this exploration, the MIT rule is utilized for this reason.

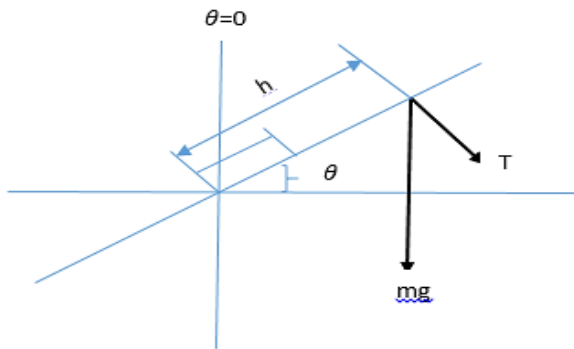


Figure 3. Pneumatic Valve free body chart [3]

From newton's law of movement and the safeguarding of exact energy, the condition of movement for the valve $J\theta^{\ddot{e}} + c\theta^{\dot{e}} + mg h_c \sin \theta = T h_1$ (1)

Expecting the valve adjusted $\theta=45^\circ$ from Figure 2, inner diameter, $d_2=14\text{mm}$, let t =thickness of the chamber.

For a meager chamber as per [15], Thickness is given by

$$t < \frac{1}{20} d_2 \tag{2}$$

$$\therefore t < 0.7\text{mm}$$

Taking the thickness of the chamber to be around 0.6 mm

to ensure for secure arrange

$$d_1 = 14 + 0.6 + 0.6 = 15.2\text{mm}$$

The versatile component planned will change the boundary in the control law and it likewise ensures the steadiness of the control framework. The union of the following mistake to 0 is likewise ensured by this versatile instrument. Taking fractional subsidiaries of mistake e concerning θ_1 and θ_2 , the awareness subordinations not set in stone. The reference input U_c is inconsequential on the grounds that it doesn't think about the boundaries concerning θ_1 and θ_2 , the awareness subordinations not set in stone. The reference input U_c is inconsequential on the grounds that it doesn't think about the boundaries.

$$y_{plant} = \left(\frac{0.534}{s^2 + 0.075s + 0.418} \right) U_c \tag{3}$$

$$\frac{d\theta_1}{dt} = -\gamma e \frac{\delta\theta}{\delta\theta_1} = -\gamma e \left(\frac{0.340}{s^2 + 0.075s + 0.418} \right) U_c \tag{4}$$

$$\frac{d\theta_2}{dt} = -\gamma e \frac{\delta\theta}{\delta\theta_1} = -\gamma e \left(\frac{0.340}{s^2 + 0.075s + 0.418} \right) y_{plant} \tag{5}$$

The reference model of the pneumatic valve is, utilizing the second-request standard condition

$$\frac{\omega_n^2}{s^2 + 2\delta\omega_n + \omega_n^2}$$

Having the value of each parameter $\omega_n = 53.95 \text{ rad/sec}$ it is the natural frequency of the system

Damping proportion (δ)=0.9 and back substituting the qualities

$$y_m = \frac{2910.6}{s^2 + 97.1s + 2910.6} \tag{6}$$

3.3 PID Controller

A corresponding fundamental subsidiary regulator (PID regulator) is a control circle input component (regulator) broadly utilized in modern control frameworks. A PID regulator ascertains blunder esteem as the contrast between a deliberate interaction variable and the ideal set point. The regulator endeavours to limit the mistake by changing the interaction using a controlled variable. The PID regulator calculation includes three separate steady boundaries and is as needs be some of the time called three-term control: the corresponding, the indispensable, and subsidiary qualities, meant P, I, and D [15]. The weighted amount of these three activities is utilized to change the interaction through the control component to the pneumatic valve position.

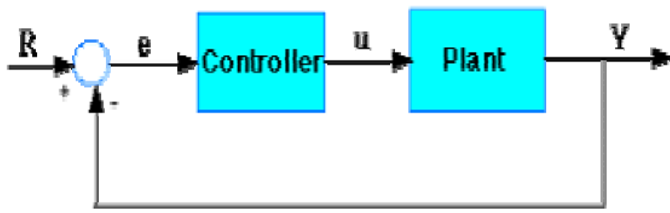


Figure 4. Block outline of PID Connection [17]

The exchange capacity of the PID regulator resembles the accompanying:

$$K_P + \frac{K_I}{S} + K_D S = \frac{K_D S^2 + K_P S + K_I}{s} \quad (7)$$

Where K_P is Proportional gain, K_I is Integral gain, K_D is Derivative gain, using the parallel connection to find the controller $U(t)$

$$U(t) = K_P e(t) + K_I \int_0^t e(t) dt + K_D \frac{d}{dt} e(t) \quad (8)$$

3.4 Fuzzy Logic Control

Fuzzy control is a control framework considering AI is characterized as clever control. A fuzzy control framework basically takes the experience and instinct of some human-plant administrator and at times those of a fashioner or analyst of a plant. The numerical model of the plant isn't needed in fuzzy control. It is a versatile and nonlinear control and gives vigorous execution for both straight and nonlinear plants with boundary variety [16].

Configuration of FLC

Principal components of Fuzzy Logic Controller, (1) Fuzzification Block, (2) Knowledge base, (3) Decision Making Block (4) Defuzzification block

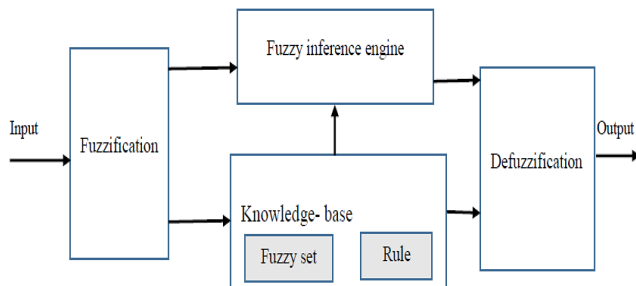


Figure 5. Fuzzy system structure [16]

Steps to design a Fuzzy Logic Controller:

- (1) Selecting the contribution to the FLC,
- (2) Selecting appropriate MFs both for information and result factors
- (3) Fuzzification of the information factors,
- (4) Preparing a fuzzy rule base for the regulator,
- (5) Selecting the appropriate defuzzification method,

- (6) Defuzzification of result that will be given to the framework for the ideal activity

Selecting and Designing Membership functions

- Coming up next are the extent of potential gains of clamminess that is persevered through and some not suffered inside the valve: For the scope of 1-5%
- 0-1%: this reach from 0-1% is the base measure of dampness that can enter the valve and causes no harm or less to the valve which won't bring about the failure of the valve
- 1-3%: for this scope of upsides of dampness entering the valve, the valve might in any case work proficiently opening to 90o however further openness to the dampness might bring about the breaking down in the valve.
- 3-5%: This scope of dampness isn't acknowledged inside the valve. These might bring about wear, rusting, and breakdown of the machine.

Effect of build-up on the pneumatic valve foreign and rough particles cause the scoring of the materials and increment the pace of wear. The expanded pace of wear brings about a decreased life expectancy of the valves prompting disappointment. To forestall the disappointment of the valves because of residue, a control framework will be planned that will forestall unsatisfactory measures of residue to enter through the valve.

- Coming up next are the scope of valves of residue acknowledged and not acknowledged inside the pneumatic valve: for a scope of 0-1%
- 0-0.02%: this reach from 0-0.02% is the base measure of residue that can enter the valve. For this reach, the valve might in any case work appropriately without failing.
- 0.02-0.5%: For the 0.02-0.5% scope of upsides of residue entering the valve, the valve might in any case work productively and open to the greatest point up to 90o C. Further openness to the residue might bring about breaking down in the valve.
- 0.5-1%: These scopes of residue are not acknowledged inside the valve. These might bring about wear, scoring, and ultimately the breakdown of the machine.

Fuzzy Membership Functions for Moisture input

In this proposed fuzzy regulator plan, a three-sided fuzzy enrolment work is decided to control the residue range, two sources of info and one result variable are proposed. It maps the upsides of fluffly factors in a specific district to the level of participation (μ) somewhere in the range of 0 and 1. Input variable-1 is dampness and information variable-2 is dust. The result variable is an adjustment of valve position, the construction of the fluffly rationale regulator is Mamdani type.

Table 1. Crisp input range and MFs for Moisture input

Crisp Input Range (%)	Fuzzy set	Membership function chosen
0-1	Low	Triangular
1-3	Acceptable	Triangular
3-5	High	Triangular

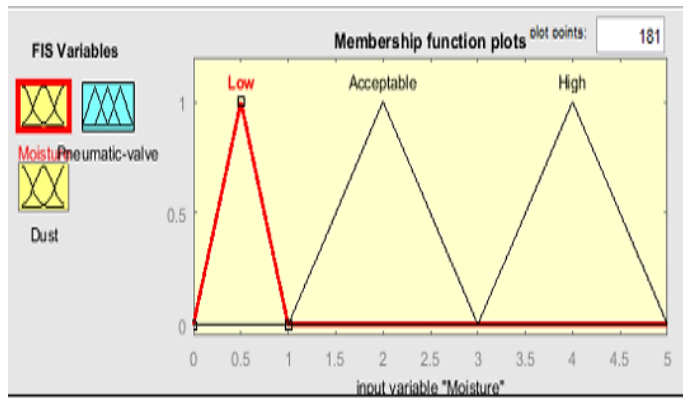


Figure 6. Membership Function editor for input Moisture

Input dampness is fuzzified into three-sided enrollment works and scaled in the reach from 0 to 5 as displayed in Figure 6 and Table 1. The three MF of dampness input are Low, Acceptable, and High, the worth of 0 shows that least dampness input and the 5 demonstrates the most elevated dampness input.

Fuzzy Membership Functions for Dust input

The residue is second-factor inputs which are fuzzified into three-sided enrolment works and scaled in the reach from 0 to 1, as displayed in Figure 7 and Table 2. The three MF of residue input are Low/awesome, Better, and Not satisfactory. The worth of 0 demonstrates that most reduced dust input range and the worth of 1 shows the most noteworthy residue input range. The three-sided kind of enrolment work delivered a great outcome for the scopes of the factors considered.

Table 2. Crisp input range and MFs for Dust input

Crisp input Ranges (%)	Fuzzy Variable name	Membership function chosen
0-0.02	Low/perfect	Triangular
0.02-0.5	Better	Triangular
0.5-1	Not acceptable/Bad	Triangular

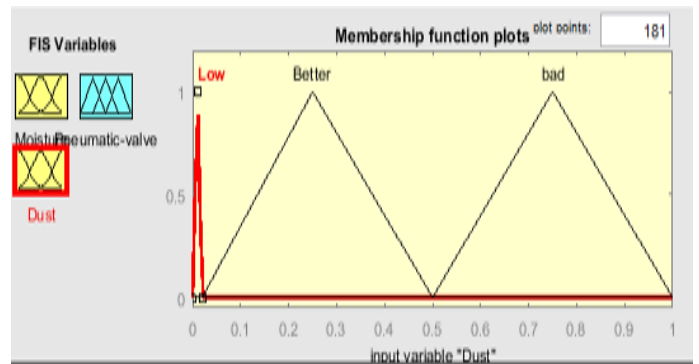


Figure 7. Membership Function editor for input Dust

Fluffy Membership Functions for valve position (yield variable)

The adjustment of valve position is the result fluffy variable which is assessed for each transport by considering dampness and residue as information factors to the fluffy master framework utilizing a bunch of rules, which are created from subjective depictions. The standards are summed up in the fluffy choice rule given in table 3, change in valve position is a fluffy variable having two three-sided enrolment works and scaled in the reach from 0 to 100, as displayed in Figure 8. The two participation elements of progress in valve position are Close and Open. The base worth of progress in valve position demonstrates the largest number of uncleaned bottles returned. The reach for the MF was picked in light of the valve point position opening rate of 100 percent and 0% to show individually, fully opened and absolute shut position of the valve.

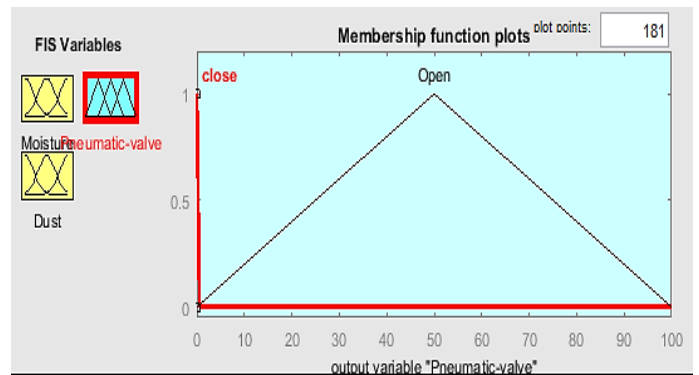


Figure 8. Membership Function editor for output pneumatic valve.

Development of FL Rule Base for Moisture and Dust Control

The plan of the fluffy regulator basically sums to picking a bunch of rules ("rule base"), where each standard addresses the information that one can use to control steam turbine speed. Considering the accompanying arrangement of rules which is proportionally displayed in Figure 9 and Table 3 for the proposed design [16]. The standard base comprises an assortment of master rules which are needed to meet the control objectives. These control rules can be created from overview results, presence of mind, general

standards, and instinctive information. The IF-THEN or then again IF-AND-THEN standards are chiefly going to be utilized in planning the regulator. The circumstance for which the guidelines are projected is given by the IF part. The fluffy framework response in this state will be given by the THEN part. The etymological factors for the dampness and residue control will expect semantic qualities and these can be portrayed in Table 3.

Table 3. Determination of Fluffy Set Rule Base

SI. No.	Fluffy Set Rule
1	If dampness is Low and Dust is Low then the pneumatic valve is open(1)
2	If dampness is Acceptable and Dust is Better then the pneumatic valve is open
3	If dampness is High and Dust is Bad then the pneumatic valve is close
4	If dampness is Low and Dust is Bad then the pneumatic valve is close
5	If dampness is Low and Dust is Low then the pneumatic valve is close
6	If dampness is Acceptable and Dust is Bad then the pneumatic valve is close

The rule viewer displays a roadmap of the whole fuzzy inference process. The Figure 9 shows the rule view how the moisture input and dust input can change the valve position accordingly. For moisture input at medium range or Acceptable and the dust is better the valve position is open.

The initial two segments of the plots (yellow plots) under Figure 9 show the participation capacities referred to by the precursors or the if-part of each standard. The third section of plots (the blue plots) shows the participation capacities referred to by the subsequent or the then-part of each standard.

The seventh plot in the third section of plots addresses the total weighted choice for the given induction framework. This choice will rely upon the information values for the framework. The defuzzified yield is shown as an intense vertical line on this plot.

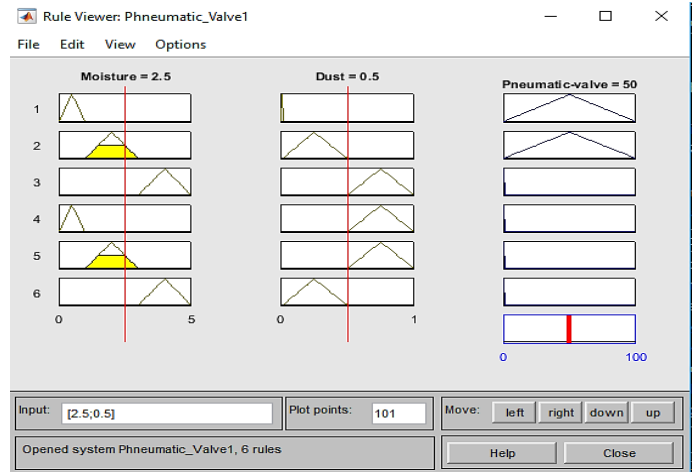


Figure 9. Rule Viewer for the pneumatic valve in controlling Moisture and Dust Editor Window.

Simulink model of MRAC with Fuzzy logic controller (MRAFC)

The Figure 10 shows that the overall Simulink circuit of Model Reference Adaptive Fuzzy Control. MRAC used the LYAPUNOV rule for finding the θ_1 and θ_2 that used as parameter, then the output of the Fuzzy Logic will be amplified before applied on the plant and for the reference input of temperature set point amplification is used for applying the large step input. The reenactment is completed by changing the addition boundary θ_1 and θ_2 .

Simulink model of Fuzzy logic controller with PID

The new fuzzy-PID regulator is currently surveyed for its capacity to control nonlinear and time-fluctuating plants and to assess its presentation in examination with the comparing PID control tuned without the fluffy piece of the calculation. The input error and change in error for the Fuzzy logic is amplified with the gain amplifier which is used as input for the PID parameters before it is applied to plants and is shown in Figure 11.

to diminish the worth of the initial rate from half to focus on the scope of residue from 0.51-0.565. Then, at that point, the valve stays shut everything down 0.94 of residue, and the valve begins to open again from zero to half-past 0.95. This shows that, at stay 5% level of clamminess and underneath, the pneumatic valve will not be affected at transient levels, and it will remain safe. Dust at above 0.95 will impact the pneumatic valve and ought to be ruined by the MATLAB programming with fluffy reasoning to thwart entrance into the container washer and thus proactive upkeep in an insightful manner. Build up can be obliged by the soft reasoning control and accordingly the pneumatic valve is safeguarded from remaining.

4.2 Simulink Result of Fuzzy PID

From the outcome displayed under Figure 15, one can reason that the time reaction of Fuzzy rationale with PID regulator was gotten utilizing the MATLAB re-enactment and the discrete worth is given under Table 4. From Figure 16 valve stays open at half from the worth of residue 0-0.55. Once more, the valve begins to diminish the worth of the initial rate from half to focus on the scope of residue from 0.56-0.578. Then, at that point, the valve stays a little open at 4.26% up to 0.98 of residue esteem, and the valve begins to open even more again from 4.26% to half-past 0.98 of residue. Dust above 0.98 will impact the pneumatic valve and ought to be blocked by the MATLAB programming with cushy reasoning to hinder entrance into the holder washer.

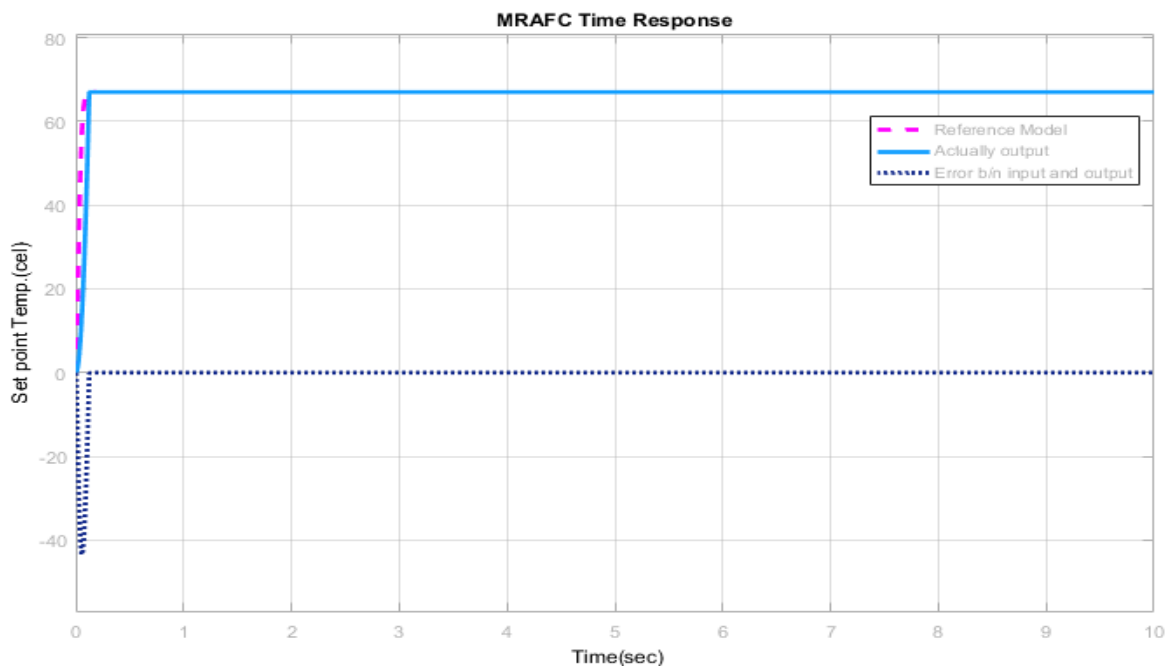


Figure 12. Simulink model using MRAFC

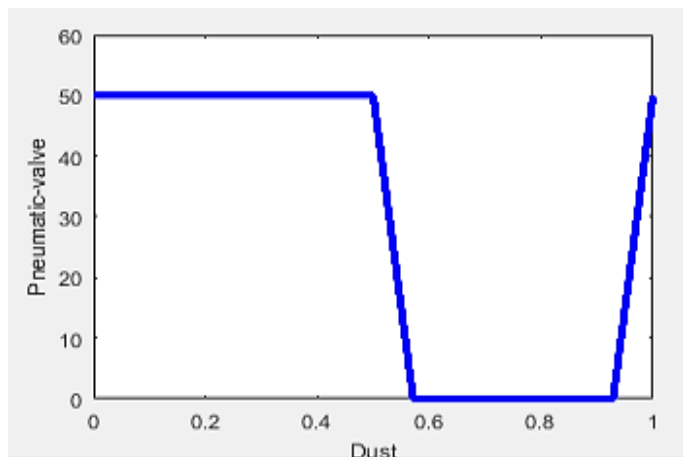


Figure 13. Surface viewer for pneumatic valve and dust

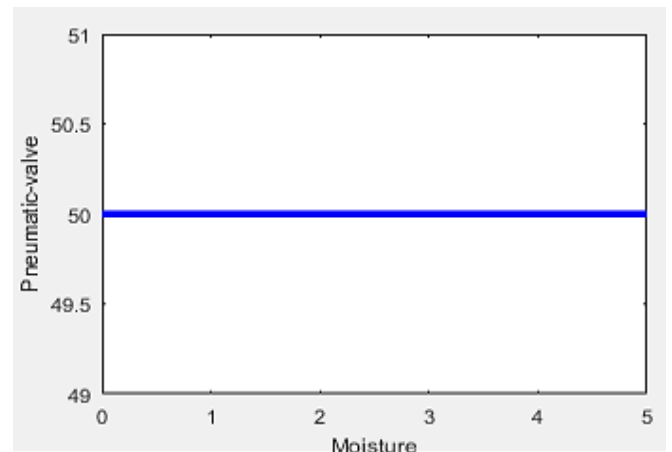


Figure 14. Surface viewer for valve and Moisture

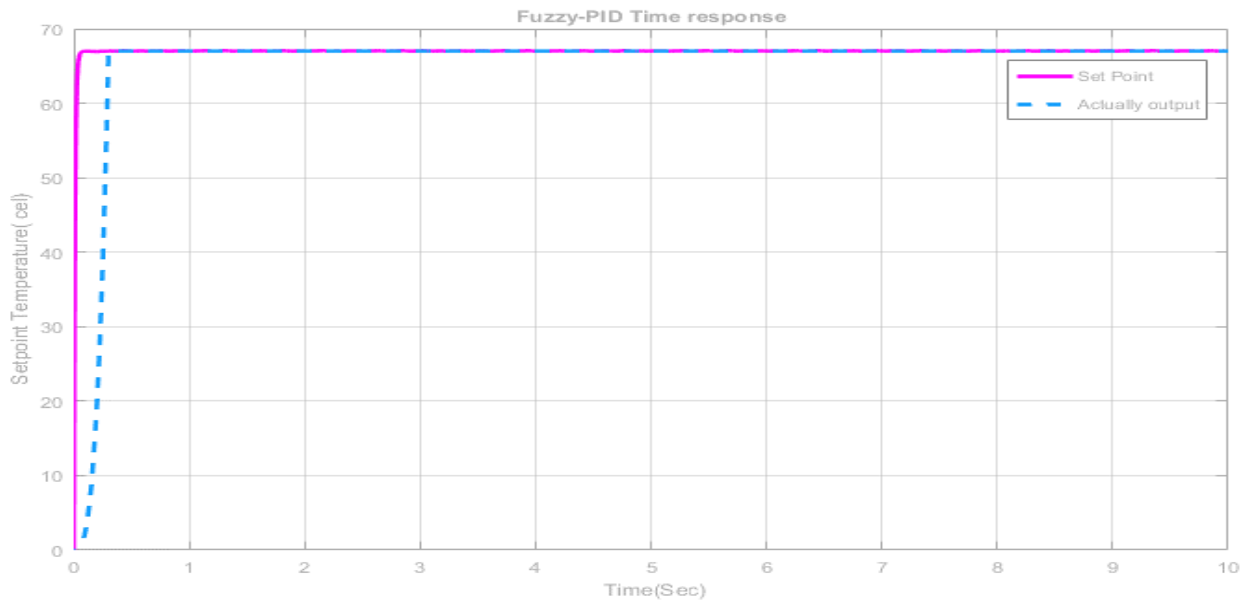


Figure 15. Simulink model using Fuzzy-PID Controller

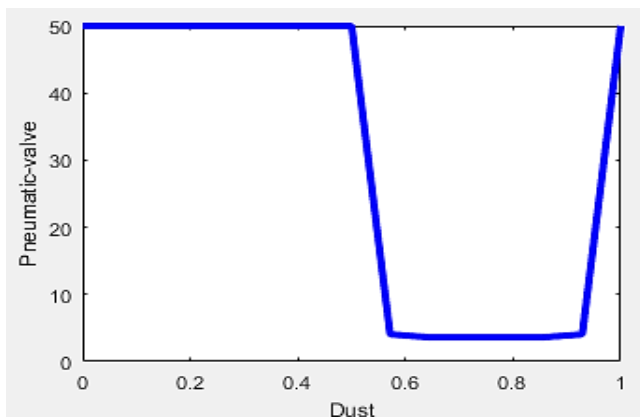


Figure 16. Surface watcher for pneumatic valve and Dust with Fuzzy-PID

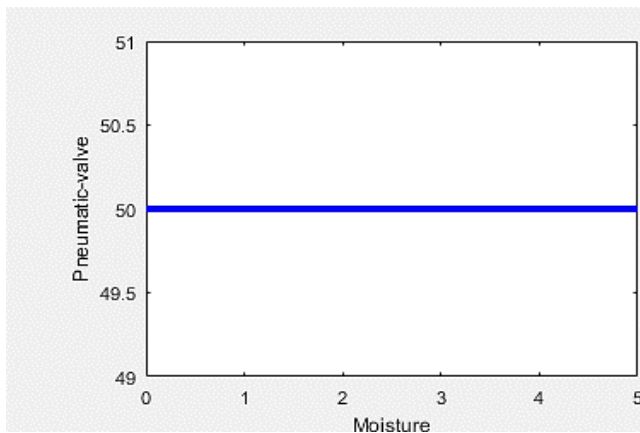


Figure 17. Surface watcher for pneumatic valve and Moisture with Fuzzy-PID

4.3 Comparative Discussion

Table 4 portrays the near conversation of the created approach. For the most part the recreation consequence of the pneumatic valve utilizing MRAC with Fuzzy Logic regulator and Fuzzy-PID from Figure 10 and Figure 11. The outcome shows that the transient reaction of the framework before consistent state esteems is reached as portrayed in Figure 12 and Figure 15. The framework was planned with a set point temperature 67°C. The framework was tried distinctly for temperature conditions since the tension provided doesn't influence the valve activity. Figure 13 and Figure 16 likewise show this outcome utilizing the surface watcher of residue with pneumatic valve position complete shut from dust worth of 0.567 to 0.94 for the instance of MRAC regulator and stays little open 4.26% from dust worth of 0.678 to 0.98 for the instance of F-PID. regulator. Once more, utilizing the F-PID regulator the transient reaction (rise time and undershoot) 150.101ms and - 0.505% and with MRAC 77.69ms and - 0.505% separately. By and large, with the proposed regulator MRAC 93.245% and 71.485 % rise time and overshoot individually improvement near to the F-PID.

Table 4. Time Response analysis for MRAFC and F-PID

Parameters	With Fuzzy-PID	With MRAFC				% of Improvement
		$\gamma = 0.1$	$\gamma = 0.2$	$\gamma = 2$	$\gamma = 5$	
Peak time (sec)	0	0	0	0	0	0
Rise Time (ms)	150.101	77.674	77.670	77.680	77.695	93.245
Overshoot (%)	0.505	0.505	0.505	0.505	0.505	0
Undershoot (%)	-0.505	-0.144	-0.505	-0.505	-0.505	71.485

5. Conclusion

The principal objective of this undertaking was to investigations the main drivers prompting the staying and fizzling of the pneumatic valve of the jug clothes washer and to foster a misleadingly shrewd framework that would assist with decreasing the recurrence of staying and disappointment of the pneumatic valve, henceforth diminish breakdowns of the jug clothes washer. The fundamental driver assessment showed that temperature, strain, and minor responsibilities build up and dampness were the essential drivers inciting the remaining of the valve. The AI structure should get to know the intelligent components of the valve and have the choice to change the pneumatic valve point because of the condition. In this assessment, the MRAFC and F-PID plans were proposed for the control of the pneumatic valve. An examination between the two regulators was done utilizing reproductions and the proposed MRAFC regulator showed superb following outcomes when contrasted with the F-PID regulator. The re-enactment result showed that transient exhibition of the framework and opening and shutting of the pneumatic valve relying upon dust worth can be improved essentially by the proposed MRAFC conspire.

Acknowledgments

The authors would like to thank Jimma University, Jimma Institute of Technology for providing funding during the study.

References

[1] Parry, J., Shaw, L., Arnaud, M.J. and Smith, A.J., 2001. Investigation of mineral waters and soft drinks in relation to dental erosion. *Journal of Oral Rehabilitation*, 28(8), pp.766-772.

[2] Rownak, R., 2019. Factors affecting brand equity of carbonated soft drinks industry: a study of Coca-Cola and Pepsi from Malaysian youth perspective (Master's thesis, Kuala Lumpur: Kulliyyah of Economics and Management Sciences, *International Islamic University Malaysia*, 2019).

[3] Rambukwella, R., Priyadarshana, D. and Vidanapathirana, R., 2015. Comparative Study on Consumer Preference of Fruit Drinks and Carbonated Drinks in Sri Lankan Beverage Market. *Hector Kobbekaduwa Agrarian Research and Training Institute*.

[4] Hufemia, A.M.M., 1996. Caustic soda recovery in a bottle washing plant using membrane technology. *Master of Engineering, Asian*

Institute of Technology-School of Environment, Resources and Development, Bangkok, Thailand.

[5] Dulecha, K. A., Thelkar, A.R., 2021. Speed Control of Brushless Dc Engine Using fuzzy Based Show Reference Versatile Control. published in *Journal of Instrumentation and Innovation Sciences, MAT Journals*, vol.6, Issue-1, pp.1-35, eISSN: 2456-9860.

[6] Chidoko, C., Sakuhuni, R.C. and Mufandaedza, S., 2015. The structure-conduct-performance paradigm and the beer industry in Zimbabwe. *Global Journal of Advanced Research*, 2(4), pp.735-741.

[7] Shoga, T., Thelkar, A.R., Bharatiraja, C., Mitiku, S. and Adedayo, Y., 2019. Self-tuning regulator based cascade control for temperature of exothermic stirred tank reactor. *FME Transactions*, 47(1), pp.202-211.

[8] Mushiri, T., Mahachi, A. and Mbohwa, C., 2017. A model reference adaptive control (MRAC) system for the pneumatic valve of the bottle washer in beverages using simulink. *Procedia Manufacturing*, 7, pp.364-373.

[9] Zadeh, L.A., 2008. Is there a need for fuzzy logic?. *Information sciences*, 178(13), pp.2751-2779.

[10] Patil, N.J. and Waghmare, L.M., 2010. Fuzzy adaptive controllers for speed control of PMSM drive. *International Journal of Computer Applications*, 975, p.8887.

[11] Wang, C. and Zhu, Z.Q., 2020. Fuzzy logic speed control of permanent magnet synchronous machine and feedback voltage ripple reduction in flux-weakening operation region. *IEEE Transactions on Industry Applications*, 56(2), pp.1505-1517.

[12] Teeter, J., Chow, M.Y. and Brickley, J.J., 1994, December. Use of a fuzzy gain tuner for improved control of a DC motor system with nonlinearities. In *Proceedings of 1994 IEEE International Conference on Industrial Technology-ICIT'94*, pp. 258-262.

[13] Lee, C.K. and Chan, W.T., 1995, May. Utilization of the saturation effect on a DC motor drive with a fuzzy controller. In *Proceedings IEEE Conference on Industrial Automation and Control Emerging Technology Applications*, pp. 342-349.

[14] Viorel, I.A. and Hedesiu, H., 2001, June. On the induction motors speed estimators robustness against their parameters. In *IEMDC 2001. IEEE International Electric Machines and Drives Conference (Cat. No. 01EX485)*, pp. 931-934.

[15] Gajjar, A.G., Patel, A.I. and Singh, R.G., 2015, March. Design and development of bottle washer machine for small scale beverage industry. In *2015 International Conference on Advances in Computer Engineering and Applications*, pp. 325-331.

[16] Feye, A., Thelkar, A.R., Bharatiraja, C. and Adedayo, Y., 2020. Reference design and comparative analysis of model reference adaptive control for steam turbine speed control. *FME Transactions*, 48(2), pp.329-341.

[17] Habtamu, S., Feye, A. and Thelkar, A.R., 2021. Design and Stochastic Modeling of Pitch Angle Control of Wind Turbine using Adaptive Controller. published in *Journal of Alternative and Renewable Energy Sources, MAT Journals*, 7(1), pp.29-39